




CMRFID
Technology CO., Ltd

RFID Electronic lead sealing tag

Product Introduction

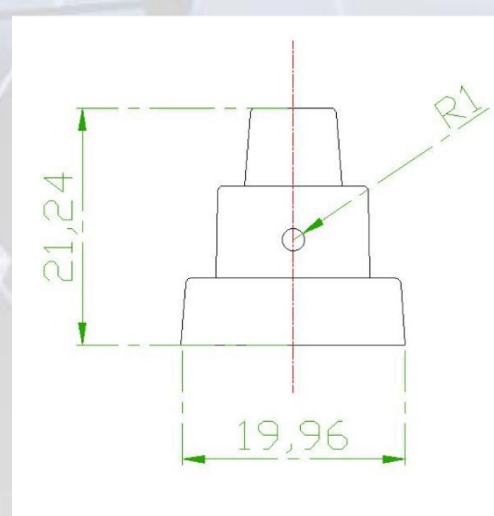

CMRFID (California)

✉ allen@cmrfid.com

☎ +1 213 393 0528

CMRFID (Brazil)

✉ Rinaldo@cmrfid.com

☎ +55 11 964337000

CMRFID (Dubai)

✉ Iman@cmrfid.com

☎ +48 574 549 256

CMRFID (Shanghai)

✉ Javier@cmrfid.com

☎ +86 18601658083

Product Parameters

Model	Lead sealing
Type	Electronic lead sealing

Physical Parameters

Products size	Head Dia 20mm□length 21.5mm, turning ear 7*8mm, line length 15CM(customizable)
Packaging materials	PC + epoxy resin + copper wire
Customization	Laser logo printing or number printing

Environmental parameters

Working temperature	-20~55°C
---------------------	----------

Technical parameters

Optional Chip	TK4100	RF08	S50	I-CODE2
Standard		ISO14443A		ISO15693
Memory		1kbyte		1024bits
Working mode	Read only	Read/ write, invalid when cable line cut down		
Operating frequency	125KHZ	13.56MHZ		
Data retention	10 years			
Programing Cycles	100,000 times			
Read Distance	5-10CM	1-3CM		

Business application

Application field	bank, instrument, postbag, petroleum transportation, water and electricity, custom, chemical engineering etc.
-------------------	---